

SHANTUI AUSTRALIA

SE58SR

Crawler Excavator



Engine model: Kubota V2607
Engine power: 35 kW/2200 rpm
Operating weight: 5,850 kg
Bucket capacity: 0.18 m³

POWERED BY

EVCORE®

SE58SR TECHNICAL PARAMETERS

ENGINE

Model	Kubota V2607
Type	Four-cylinder, water-cooled, direct injection
No. of cylinders	4
Emission standard	EPA Tier 4 Final/Europe Stage V
Displacement	2.615L
Rated power	35kW/2200rpm

HYDRAULIC SYSTEM

Type	Axial variable plunger pump
Rated operating flow	158.4L/min

DIGGING FORCE (ISO 6015)

Bucket digging force	42.3 kN
Arm digging force	26.9 kN

BUCKET

Type	Backhoe bucket
Bucket capacity	0.18m ³
Bucket width	600mm

TRAVEL SYSTEM

Type	Axial variable plunger motor
Number of track rollers	5X2
Number of carrier rollers	1X2
Number of track shoes	39X2
Travel speed	2.5/4.2km/h
Traction force	70kN
Gradeability	30°

SWING SYSTEM

Swing motor type	Swash plate plunger motor
Swing speed	0~10.8r/min
Brake type	Pressure release, mechanical braking

FUEL TANK CAPACITY (L)


Fuel tank capacity	66
Cooling system	10.4
Engine oil	10
Hydraulic oil tank	45
System capacity	80

OPERATING WEIGHT AND GROUND PRESSURE

Ground pressure	32.5KPa
Operating weight	5850kg


OPERATING RANGE(MM) (Boom: 2780 mm Arm: 1635 mm)

A Max. digging height	5685
B Max. dumping height	4085
C Max. digging depth	3640
D Max. vertical digging depth	2555
E Max. digging depth cut for 2500mm level bottom	3255
F Max. digging distance	6135
G Max. digging distance at ground level	6000
H Min. swing radius of work equipment	2440

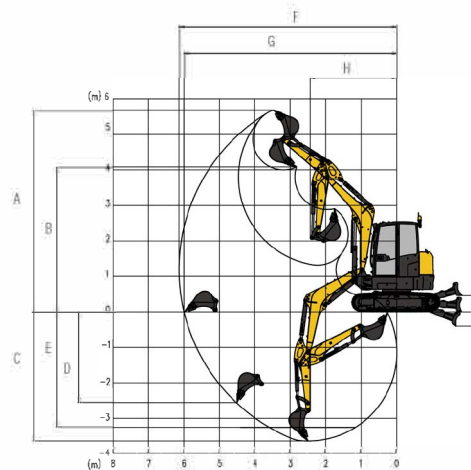

OVERALL DIMENSION (MM)

A Overall length	5420
B Ground contact length (Transportation)	3420
C Overall height (to top of boom)	1945
D Overall width	1960
E Overall height (to top of cab)	2550
F Ground clearance of counterweight	635
G Min. ground clearance	315
H Tail swing radius	1065
I Tread	1990
J Track length	2495
K Track gauge	1560
L Track width	1960
M Shoe width	400
O Bonnet height	1690
P Revolving frame width	1865
Q Distance from swivel center to tail	1065

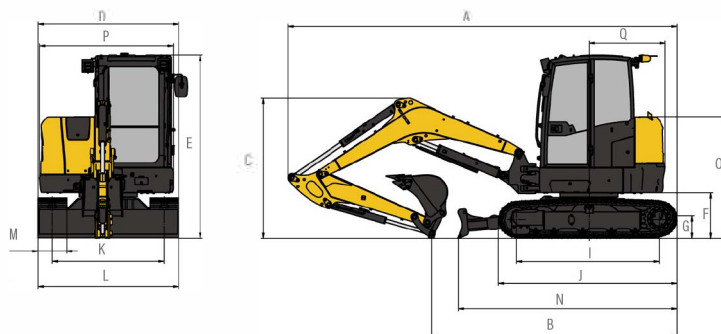

* THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONAL CONFIGURATION. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.

EV CORE
Authorised Shantui Dealers

Western Australia
Sales: 0400 665 088
8 Alex Wood Drive,
Forrestdale, WA 6112

Central Australia
Sales: 0486 199 045
35-37 Cavan Road,
Gepps Cross, SA 5094

Eastern Australia
Sales: 0400 459 097
39 Boron Street,
Sumner, QLD 4074